


WELLHEADS - REFINERIES - OFFSHORE PLATFORMS - GAS PROCESSING

# SRF FIRESLEEVE

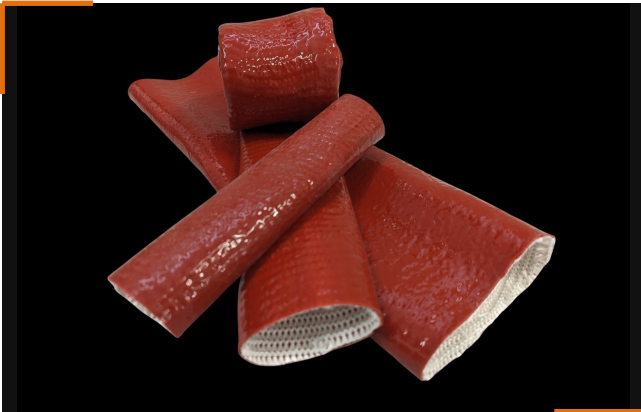

## WHAT IS IT?

SRF Firesleeve is manufactured from 'E' glass fibre yarn knitted to form a sleeve and coated with high-grade silicone elastomer rubber.

## OIL & GAS APPLICATIONS


- Wellhead hydraulic control line protection
- Refinery process area hose & cable runs
- Offshore platform deck & module hoses
- Instrumentation & SIS cable protection
- Gas processing & compressor station hoses
- Pipeline & metering station cable runs

## STANDARD FORMAT

Inside diameter: **4 mm to 203 mm**

Method of supply: **15 m coils**

## AVAILABLE COLOURS

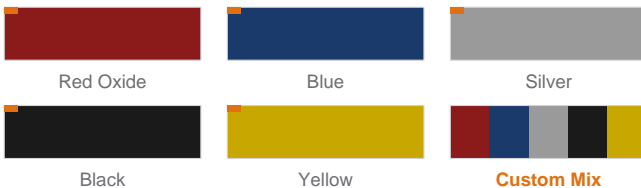

Custom colours & cut lengths available on request.  
Compliance documentation available on request.

## QUICK FACTS

Standard colour	<b>Red Oxide</b>
Continuous operating temp	<b>260 C (500 F)</b>
Molten splash resistance	<b>Outstanding</b>
Flame resistance	<b>Very good</b>
Hydrocarbon resistance	<b>Outstanding</b>
Chemical resistance	<b>Outstanding</b>
Weather & UV resistance	<b>Outstanding</b>
Avg. dielectric strength	<b>30 kV+</b>
Abrasion resistance	<b>Very good</b>
Wall thickness	<b>4 mm +/- 0.5 mm</b>

## COMPLIANCE & CERTIFICATIONS

- ✔ **EN 45545-2** Fire protection standard
- ✔ **ISO 11925-2** Ignitability of products
- ✔ **IEC 60695-11-10** Classified HB and V0
- ✔ **UL94 V0 / V1 / V2** UL flammability rating
- ✔ **MSHA Certified** Mine Safety & Health Admin.
- ✔ **Made in Britain** Manufactured in Burnley, UK

CONTINUOUS <b>260C</b> 500F	MOLTEN SPLASH <b>1200C</b> 2192F	DIELECTRIC <b>30kV+</b> Ex-zone rated
-----------------------------------	--	---