


PROTECTING ROLLING STOCK - TRACKSIDE INFRASTRUCTURE - MAINTENANCE DEPOTS

SRF FIRESLEEVE

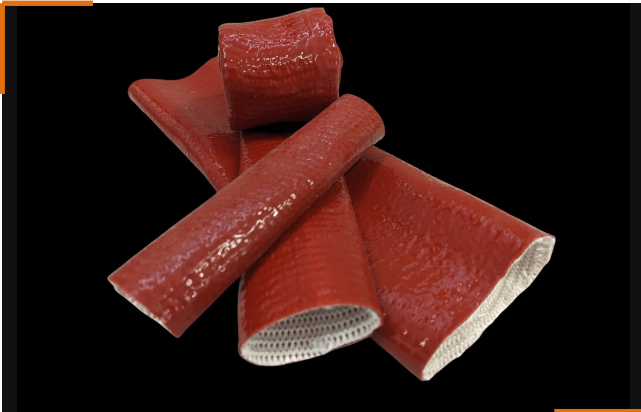

WHAT IS IT?

SRF Firesleeve is manufactured from 'E' glass fibre yarn knitted to form a sleeve and coated with high-grade silicone elastomer rubber.

RAIL APPLICATIONS


- Rolling stock cable & wiring harness protection
- Hydraulic & pneumatic hose shielding
- High-voltage traction system harnesses
- Brake line & actuator hose protection
- Depot maintenance retrofit installations
- Trackside infrastructure & signalling cables

STANDARD FORMAT

Inside diameter: **4 mm to 203 mm**

Method of supply: **15 m coils**

AVAILABLE COLOURS

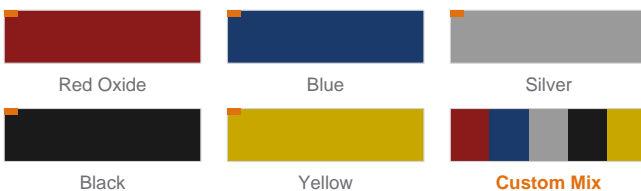

Custom colours & cut lengths available on request.
Glass locked edge option for ready-cut custom sizes.

QUICK FACTS

Standard colour	Red Oxide
Continuous operating temp	260 C (500 F)
Molten splash resistance	Outstanding
Flame resistance	Very good
Abrasion resistance	Very good
Flexibility	Outstanding
Chemical resistance	Outstanding
Weather & UV resistance	Outstanding
Avg. dielectric strength	30 kV+
Wall thickness	4 mm +/- 0.5 mm

RAIL COMPLIANCE & STANDARDS

- ✓ **EN 45545-2** Railway fire protection standard
- ✓ **ISO 11925-2** Ignitability of products
- ✓ **IEC 60695-11-10** Classified HB and V0
- ✓ **UL94 V0 / V1 / V2** UL flammability rating
- ✓ **MSHA Certified** Mine Safety & Health Admin.
- ✓ **Made in Britain** Manufactured in Burnley, UK

CONTINUOUS 260C 500F	MOLTEN SPLASH 1200C 2192F	DIELECTRIC 30kV+ HV harness safe
-----------------------------------	--	---