


SRF FIRESLEEVE

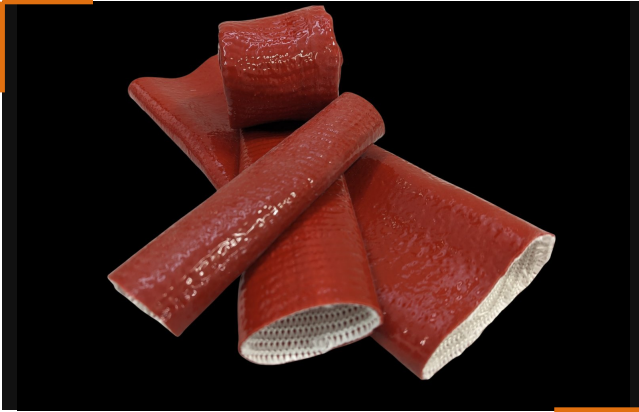

WHAT IS IT?

SRF Firesleeve is manufactured from 'E' glass fibre yarn knitted to form a sleeve and coated with high-grade silicone elastomer rubber.


APPLICATIONS

- Protects wires, cables and hoses from high ambient temperatures
- Shields personnel from burns on hot pipes and steam lines
- Reduces energy loss by retaining heat within pipework systems
- Resistant to oils, hydraulic fluids & fuels

STANDARD FORMAT

Inside diameter: **4 mm to 203 mm**
Method of supply: **15 m coils**

AVAILABLE COLOURS

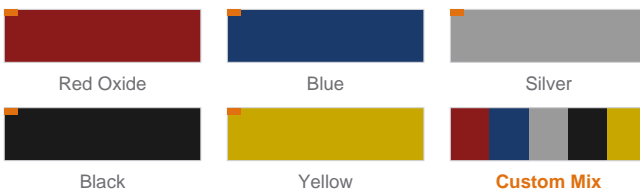

Custom colours & cut lengths available on request.
Glass locked edge option for ready-cut custom sizes.

QUICK FACTS

Standard colour	Red Oxide
Continuous operating temp	260 C (500 F)
Molten splash resistance	Outstanding
Flame resistance	Very good
Abrasion resistance	Very good
Flexibility	Outstanding
Water & oil resistance	Outstanding
Wall thickness	4 mm +/- 0.5 mm
Avg. dielectric strength	30 kV+

COMPLIANCE & CERTIFICATIONS

- ✓ Complies with EN 45545-2
- ✓ Tested to ISO 11925-2
- ✓ Meets requirement for IEC 60695-11-10
- ✓ Classified HB and V0
- ✓ Meets UL94 V0, V1, V2 rating requirements
- ✓ Made in Britain

